

**OPTICON**

Fixed Position 2D Imager Scanner

# NLV-3101



SR : Standard Range type

This manual provides specifications for the NLV-3101 fixed position 2D imager scanner.

**Specifications Manual**

All information subject to change without notice.

## Document History

<b>Model Number:</b>	<b>NLV-3101</b>	<b>Specification Number:</b>	<b>SS12019</b>
<b>Edition:</b>	<b>2nd</b>	<b>Original Spec Number:</b>	<b>SS12018</b>
<b>Date:</b>	<b>2019-06-18</b>		

## Copyright 2010 Opticon. All rights reserved.

This manual may not, in whole or in part, be copied, photocopied, reproduced, translated or converted to any electronic or machine readable form without prior written consent of Opticon.

## Limited Warranty and Disclaimers

### PLEASE READ THIS MANUAL CAREFULLY BEFORE INSTALLING OR USING THE PRODUCT.

## Serial Number

A serial number appears on all Opticon products. This official registration number is directly related to the device purchased. Do not remove the serial number from your Opticon device. Removing the serial number voids the warranty.

## Warranty

Unless otherwise agreed in a written contract, all Opticon products are warranted against defects in materials and workmanship for two years after purchase. Opticon will repair or, at its option, replace products that are defective in materials or workmanship with proper use during the warranty period. Opticon is not liable for damages caused by modifications made by a customer. In such cases, standard repair charges will apply. If a product is returned under warranty and no defect is found, standard repair charges will apply. Opticon assumes no liability for any direct, indirect, consequential or incidental damages arising out of use or inability to use both the hardware and software, even if Opticon has been informed about the possibility of such damages.

## Packaging

The packing materials are recyclable. We recommend that you save all packing material to use should you need to transport your scanner or send it for service. Damage caused by improper packaging during shipment is not covered by the warranty.

## Trademarks

Trademarks used are the property of their respective owners.

Opticon Inc. and Opticon Sensors Europe B.V. are wholly owned subsidiaries of OPTOELECTRONICS Co., Ltd., 12-17, Tsukagoshi 4-chome, Warabi-shi, Saitama, Japan 335-0002. TEL +81-(0) 48-446-1183; FAX +81-(0) 48-446-1184

---

## SUPPORT

### USA

Phone: 800-636-0090

Email: [support@opticonusa.com](mailto:support@opticonusa.com)

Web: [www.opticonusa.com](http://www.opticonusa.com)

### Europe

Email: [support@opticon.com](mailto:support@opticon.com)

Web: [www.opticon.com](http://www.opticon.com)

---

## Revision History

Specification No. : SS12019  
Product name : NLV-3101

Edition	Date	Page	Section	Description of Changes
First	2012/10/10	-	-	Initial release
Second	2019/06/18	1	2	Delete wedge from Various interfaces explanation
		2		Delete Interface, Wedge row
				Correct Supported 1D Symbologies, Curvature: Radius $\geq$ 16 mm (12-digit UPC) → Radius $\geq$ 16 mm (10-digit Codabar) Radius $\geq$ 20 mm (10-digit Codabar) → Radius $\geq$ 20 mm (12-digit UPC)
				Supported 2D Symbologies: Delete Data Matrix(ECC 000-140)
		3	3	Revise Imager, Baud rate: RS-232C (baud rate: 15.2 kbps) → RS-232C (baud rate: 115200 bps)
				Power, Range of operating voltage: Delete wedge 4.5 ~ 5.5 V → 4.5 ~ 6.6 V
				Power, Range of operating voltage, Note: Delete AC adapter information
				Environmental Specifications, Temperature, Note: Delete AC adapter information
				Update standard
		4		Delete External Power Supply column
		6	5.1	Change section head: AC Adapter Specifications → RS-232C Update the text to RS-232C information
			-	Delete 5.2. Wedge PS/2 Power Supply (Host)
		7	6	Delete wedge from the text
			6.1	Add note: * When using data other than ASCII (0x00 - 0x7F), data length must be 8 bit.
		9	6.1.2.1	Update value VCC Note: 4.5 ~ 5.5 V (Typ. 5 V) → 4.5 ~ 6.6 V Add notes to S-GND, RTS, CT, TxD and RxD
		10	6.1.2.3	Add Wire conductors diameter and Insulator outer diameter
		12	-	Delete 6.3. Wedge PS/2
		13	7.1	Correct errors: *3, *4 Reference value based on the datasheet (25°C, IF = 50 mA) → (25°C, IF = 140 mA)
15	8	Correct Condition, Scanning Test: Accept the performance with 90% or more success rate for 10 tries of scan. One scan should be tested within 1 second. → Accept the performance with 90% or more success rate for 10 tries of scan. One scan should be tested within 2 second.		
16	8.1	Correct Code39 0.508mm 4 digit Size: 36 × 25 → 43 × 25		
18	8.4	Correct errors: Distance: 100mm → 95mm		

Edition	Date	Page	Section	Description of Changes	
Second	2019/06/18	24	9.11	Correct errors: No malfunction found ( $\pm 10$ kV, air or direct discharge) →No malfunction found ( $\pm 8$ kV, air or direct discharge)	
		25	10.1	Update standard	
			10.2	Update standard	
			11	Update RoHS	
		26	13.5	Add Disposal section	
		28	15.1	Delete 15.1.1. Included AC Adapter and 15.1.2. Non Included AC Adapter	
				Update to Individual Packaging information	
		29	15.2	Update Collective Packaging information	
		31	17.2.1	Correct Codabar (NW7) Minimum length: 1 → 2	
		32	17.2.2	Add default ○: -Composite GS1 DataBar -Composite GS1-128	
				17.2.3	Delete Data Matrix(ECC 000-140)
		33	17.3	Delete wedge from [Data buffering]	
		34	17.5	Delete "Supported OS"	
			17.6	Update section head: USB-HID, Wedge Defaults → USB-HID Defaults	
			-	Delete 18. Accessories	
-	-	Update header: NLV-3101 (SR) → NLV-3101			
-	-	Correct errors, adjust format.			

## Contents

<b>1. Abstract</b> .....	<b>1</b>
<b>2. Overview</b> .....	<b>1</b>
<b>3. Basic Specifications</b> .....	<b>2</b>
<b>4. Detailed View</b> .....	<b>5</b>
<b>5. Electrical Specifications</b> .....	<b>6</b>
5.1. RS-232C .....	6
5.2. USB Power Supply.....	6
<b>6. Interface Specifications</b> .....	<b>7</b>
6.1. RS-232C .....	7
6.1.1. D-Sub9pin.....	7
6.1.2. Loose End .....	9
6.2. USB.....	11
6.2.1. USB Interface Specifications.....	11
6.2.2. Connector .....	11
6.2.3. USB Interface Circuit.....	11
6.2.4. USB Interface Cable.....	12
<b>7. Optical Specifications</b> .....	<b>13</b>
7.1. Basic Optical Specifications .....	13
7.2. Aiming Pattern.....	14
7.3. Imaging Range.....	14
<b>8. Technical Specifications</b> .....	<b>15</b>
8.1. Barcode Test Sample .....	16
8.2. Scan Area and Depth of Field.....	17
8.3. Printed Contrast Signal (PCS) .....	18
8.4. Minimum Resolution.....	18
8.5. Wide Bar Code.....	18
8.6. Pitch, Skew and Tilt.....	19
8.7. Curvature .....	19
8.8. Auto Trigger .....	20
8.9. Motion Tolerance.....	20
<b>9. Environmental Specifications</b> .....	<b>21</b>
9.1. Temperature.....	21
9.2. Humidity .....	21
9.3. Ambient Light Immunity .....	22
9.4. Dust and Drip Proof.....	22
9.5. Cable Strength .....	23
9.6. Cable Bending Strength .....	23
9.7. Vibration Strength (without packing).....	23
9.8. Vibration Strength (in individual packing).....	23
9.9. Drop Impact Strength (without packaging).....	24
9.10. Drop Impact Strength (in individual packaging) .....	24
9.11. Electrical Specifications.....	24

<b>10. Regulatory Compliance.....</b>	<b>25</b>
10.1. LED Safety .....	25
10.2. EMC .....	25
<b>11. RoHS .....</b>	<b>25</b>
<b>12. Reliability .....</b>	<b>26</b>
<b>13. Precautions.....</b>	<b>26</b>
13.1. Shock.....	26
13.2. Temperature Conditions .....	26
13.3. Foreign Materials.....	26
13.4. Other.....	26
13.5. Disposal .....	26
<b>14. Product Label.....</b>	<b>27</b>
<b>15. Packaging Specifications .....</b>	<b>28</b>
15.1. Individual Packaging .....	28
15.2. Collective Packaging .....	29
<b>16. Physical Features .....</b>	<b>30</b>
16.1. Dimensions .....	30
16.2. Weight.....	30
16.3. Mechanical Drawing .....	30
<b>17. Default Setting .....</b>	<b>31</b>
17.1. Default Setting Menu Code .....	31
17.2. Supported Symbologies .....	31
17.2.1. 1D Bar Codes.....	31
17.2.2. GS1 DataBar, Composite Code .....	32
17.2.3. 2D Codes.....	32
17.3. Other Default.....	33
17.4. RS-232C Default .....	33
17.5. USB-COM .....	34
17.6. USB-HID Defaults .....	34

## 1. Abstract

This manual provides specifications for the NLV-3101 fixed position 2D imager scanner. It is a product that has the SR (Standard Range) performance.

## 2. Overview

The NLV-3101 is a fixed position 2D imager scanner that enables high speed scanning of standard linear (1D) and 2D symbologies.

Main features of the NLV-3101 are as follows:

- High-speed scanning  
Extremely high speed performance ensures stress free scanning and fast response without being affected by hand movement and light conditions.
- Editing function  
A new function "Data Editing Program" captures up to 16 codes on multiple images simultaneously in one go. Output editing process, such as GS1 format, also can be set easily.
- World's most compact 2D scanner in its class  
The NLV-3101 offers ultra-compact size and easy operation.
- LED aiming  
A sharp single line of green LED makes it easy to aim the scanner while providing safety and long-life.
- Various interfaces  
Three types of interfaces, RS-232C, USB-HID, and USB-COM, are supported.
- RoHS compliance  
The NLV-3101 is a RoHS compliant product, which is declared by Optoelectronics Co., Ltd.

\* Refer to "NLV-3101 user's manual" for supported codes and function commands.

### 3. Basic Specifications

Item		Specification		Note	
Control Section	CPU	32-bit RISC			
	SDRAM	256 Mbits (2 M x 4 Banks x 32 Bits )			
	Flash ROM	16 Mbits (1 M x 16 Bits) Flash Memory			
Interface	RS-232C	300bps ~ 115200 bps		Default :9600bps	
	USB	·Full-Speed 12 Mbps (HID/COM)			
Optical Section	Scanning method	WVGA (0.36 million-pixel) CMOS area sensor		Frame rate: 60 fps	
	Scanning light source	2 red LEDs			
	Aiming light source	1 green LED			
	Effective pixels	0.36 million pixels (H: 752 x V: 480)			
	View angle	Horizontal: about 40.6° Vertical: about 26.4°			
Supported 1D Symbologies	Symbologies	UPC-A, UPC-A Add-on, UPC-E, UPC-E Add-on, EAN-13, EAN-13 Add-on, EAN-8, EAN-8 Add-on, JAN-13, JAN-8, Code 39, Tri-Optic, Codabar (NW-7), Industrial 2 of 5, Interleaved 2 of 5, S-Code, IATA, Code 93, Code 128, MSI/Plessey, UK/Plessey, TELEPEN, Matrix 2 of 5, Chinese Post Matrix 2 of 5, Code 11, Korean Postal Authority code, Postal Code			
	Minimum resolution	Code 39 : 0.127 mm		PCS 0.9	
	Curvature	Radius $\geq$ 16 mm (10-digit Codabar) Radius $\geq$ 20 mm (12-digit UPC)		PCS 0.9	
	Wide Bar Code	Possible to read: Code 39 with 100 mm width and resolution 0.2mm (DOF: 155 mm)			
	Motion tolerance	Possible to read: UPC moving at 2 m/s (DOF: 125 mm)			
	Depth of field (mm)	Code 39	Resolution (0.127)	90 ~ 125	PCS 0.9 * The depth of field depends on the view angle and symbol length
			Resolution (0.254)	70 ~ 190	
			Resolution (0.508)	*65~ 235	
Code 128		Resolution (0.2)	80 ~ 160		
UPC	Resolution (0.33)	55~ 185			
GS1 DataBar	Symbologies	GS1 DataBar, GS1 DataBar Limited, GS1 DataBar Expanded, Composite GS1 DataBar, Composite GS1-128, Composite EAN, Composite UPC		GS1 DataBar: formerly called "RSS"	
	Minimum resolution	GS1 DataBar : 0.169 mm Composite Code : 0.169 mm			



Item		Specification		Note	
Supported 2D Symbolologies	Symbolologies		PDF417, MicroPDF417, Codablock F, QR Code, Micro QR Code, Data Matrix (ECC 200), MaxiCode (Modes 2 to 5), Aztec Code, Chinese Sensible Code		Disable Code 128 when Codablock F is enabled.
	Minimum resolution (mm)		PDF417 : 0.169 mm QR Code : 0.212 mm Data Matrix : 0.212 mm		PCS 0.9
	Depth of field (mm)	PDF417	Resolution (0.169)	85 ~ 130	PCS 0.9
			Resolution (0.254)	65 ~ 180	
		QR Code	Resolution (0.212)	95 ~ 115	
Resolution (0.381)	60 ~ 185				
Data Matrix	Resolution (0.254)	80 ~ 145			
Common	Scan angle		Pitch : $\pm 50^\circ$		
			Skew : $\pm 50^\circ$		
			Tilt : $\pm 180^\circ$		
Minimum PCS		0.3 or more		MRD: 32% or more	
Imager	Image data format		Windows Bitmap, JPEG		Black spot may appear on images, however, it does not affect the scanning performance.
	Shades of gray		1024, 256, 16, 2		
	Range of output image		Select top/bottom (row) and left/right (column)		
	Resolution of output image		Full, 1/2, 1/4		
	Interface of output image		RS-232C, USB-COM		
	Baud rate	USB-COM (full speed)		About 3 sec	
RS-232C (baud rate: 115200 bps)		About 40 sec			
Power	Range of operating voltage		4.5 ~ 6.6 V		
	Current consumption (RS-232C)	Reading	265 mA (max)		Except the communication speed of 115200 bps.
Standby		70 mA (max)			
Environmental Specifications	Temperature	Operating	-20 ~ 50°C		
		Storage	-20 ~ 60°C		
	Humidity	Operating	20 ~ 85% (no condensing, no frost)		
		Storage	20 ~ 90% (no condensing, no frost)		
	Ambient light immunity	Fluorescent	10,000 lux or less		UPC Optical axis angle: 75° Distance: 125 mm
		Sunlight	100,000 lux or less		
	Vibration		10 Hz ~ 100 Hz, acceleration of 19.6 m/s <sup>2</sup> , 60 minutes per cycle, repeat once in each X, Y and Z-direction		
Drop		Drop 3 times, at each 5 faces (right, left, front, back and top), from a height of 75 cm onto a concrete surface.		* Excluding the part where the interface cable is attached	
Dust and drip proof		IP65			

Item		Specification	Note	
Regulatory	This scanner is an Exempt Risk Group LED product.			
	LED safety	IEC 62471:2006 Exempt Risk Group	Peak Wavelength: 624 nm	
	EMC	VCCI クラス B / FCC Class B / EN 55032 Class B、EN 55024	For residential, commercial and light-industrial environments	
	Product safety	CE Marking		
Immunity Test	ESD immunity	No destruction	15 kV (Apply static electricity 50 times to the surface of the scanner)	Condition: IEC:61000-4-2 compliant
		No malfunction	Contact discharge (direct / indirect): $\pm 6$ kV Air discharge (direct): $\pm 8$ kV	
	Radio-frequency electromagnetic field. Amplitude modulation	Frequency	80 ~ 1000 MHz	Condition: IEC61000-4-3 compliant
		Level	3 V/m	
		AM	80% (AM)	
	Fast transient	Voltage	Alternating-current input cable: $\pm 1$ kV	Condition: IEC61000-4-4 compliant
		Pulse	5 / 50 ns (Tr / Tw)	
		Frequency	5 kHz	
	Surge	Pulse	1.2 / 50 ns (Tr / Th)	Condition: IEC61000-4-5 compliant
		Voltage	From L to P : $\pm 2$ kV (closed-loop voltage)	
			From L to L : $\pm 1$ kV (closed-loop voltage)	
	Radio-frequency common mode	Frequency	0.15 ~ 80 MHz	Condition: IEC61000-4-6 compliant
		Level	3 V	
		AM	80% (AM)	
	Power frequency magnetic field	Frequency	50 and 60 Hz	Condition: IEC61000-4-8 compliant
Level		3 A/m		
Voltage dip, momentary voltage drop, fluctuation	Dip 1	Drop 30%, 0.5 cycles	Condition: IEC61000-4-11 compliant	
	Dip 2	Drop 60%, 5 cycles		
	Momentary drop	Drop > 95%, 250 cycles		
Physical Features	Dimensions	41.1 x 33.0 x 24.0 (DWH mm)		
	Weight	Approx. 30 g	Excluding the interface cable	

**4. Detailed View**

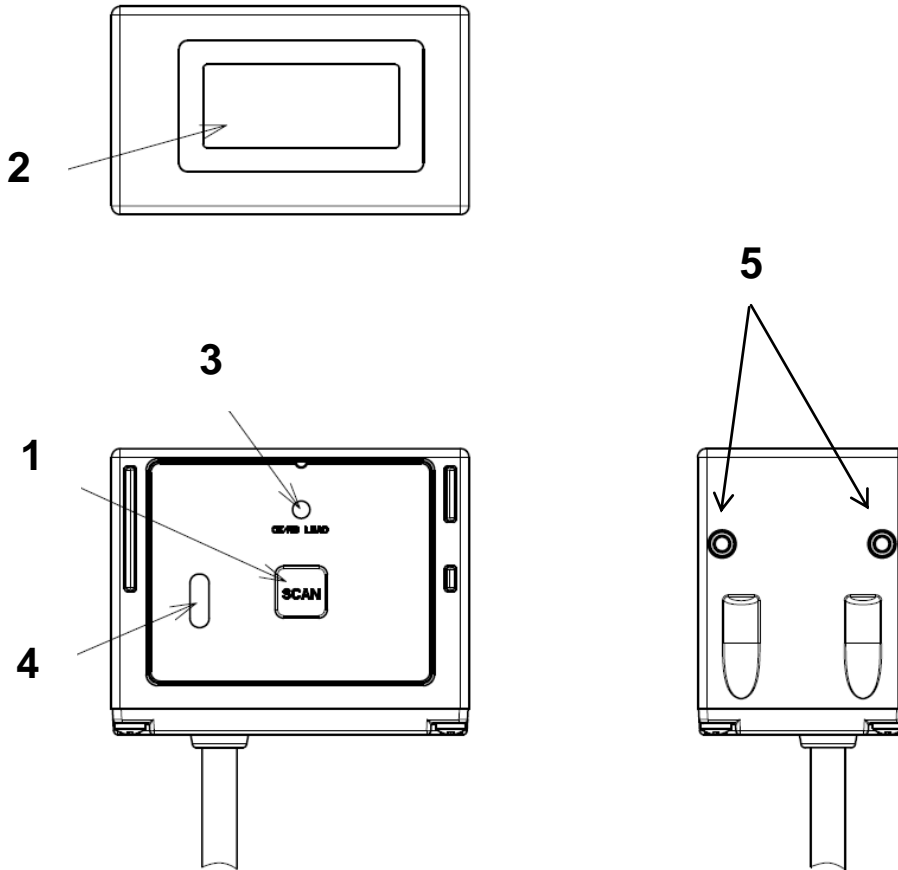


Figure 1: Detailed View of NLV-3101

No	Name	Description
1	Trigger Key	By pressing this key, the scanner starts taking an image from the scanning window and LED illumination is emitted to read 1D/2D codes.
2	Scanning Window	Light paths of the imager, LED illumination and LED aiming. Ensure that the lens is not exposed to dust and dirt before scanning.
3	Status LED	The operating statuses are indicated by different colors.
4	Buzzer Hole	A sound from a built-in buzzer comes out through these holes. When they are covered, the buzzer sound may not be able to be heard. The sound varies depending on the status. Buzzer settings can be configured in various ways: enable or disable buzzer as well as change the loudness and duration.
5	Mounting Holes	Screw holes for installing the scanner. Two more holes are located on the back side, the opposite side of where the trigger key is located.

## 5. Electrical Specifications

### 5.1. RS-232C

Range of working voltage	: 4.5 to 6.6 V
Power ripple	: 100 mVp-p max (10 to 100 kHz, power supply voltage 5.0 V)
Current consumption*	: 265 mA (max) during reading 70 mA (max.) in stand-by mode

### 5.2. USB Power Supply

Power (typical)	: 5.0 V @500 mA High-Power port
Current consumption	: 400 mA (max) during reading 85 mA (max) in stand-by mode operation

\* The current consumption was measured at 25°C.

## 6. Interface Specifications

The NLV-3101 supports three types of interfaces; RS-232C, USB-HID, and USB-COM.

### 6.1. RS-232C

The RS-232C interface has two specifications for connecting to the host: D-Sub9pin with DC jack and loose end (10 wires) with sequencer signals.

#### Communication Setting

Baud rate : 300 ~ 115200 bps  
 Data length : 7 / 8 bits  
 Parity bits : None / Even / Odd parity  
 Stop bits : 1 / 2 bit

\* Multi byte character data or images can be transmitted via RS-232C interface.

\* When using data other than ASCII (0x00 - 0x7F), data length must be 8 bit.

**Signal Level:** signal names are based on the signals transmitted from the scanner to the host.

Signal Name	IN/OUT	Voltage(V)	
		Mark	Space
TxD	OUT	-5 ~ -15	+5 ~ +15
RxD	IN	-3 ~ -15	+3 ~ +15
RTS	OUT	-5 ~ -15	+5 ~ +15
CTS	IN	-3 ~ -15	+3 ~ +15

**Signal Level:** sequencer signals (loose end spec only)

Signal Name	IN/OUT	Voltage(V)	
		L level	Space / ON
External trigger	IN	-0.3 ~ 0.6 V	3 V ~ Vcc +0.3 V
OK	OUT	0.3 V / 10 mA	OC output / Vcc +0.3 V
NG	OUT	0.3 V / 10 mA	OC output / Vcc +0.3 V

#### 6.1.1. D-Sub9pin

##### 6.1.1.1. Pin Assignment

Signal Name	Pin No.	Note
Shield	1	
TxD	2	
RxD	3	
(NC)	4	Connect to pin 6
GND	5	
(NC)	6	Connect to pin 4
CTS	7	
RTS	8	
(NC)	9	Open (not connected)

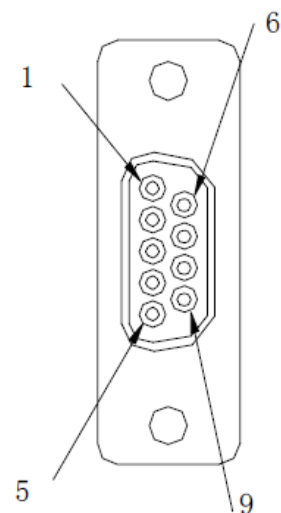


Figure 2: RS-232C D-Sub9pin Connector

6.1.1.2. RS-232C D-Sub 9pin Circuit

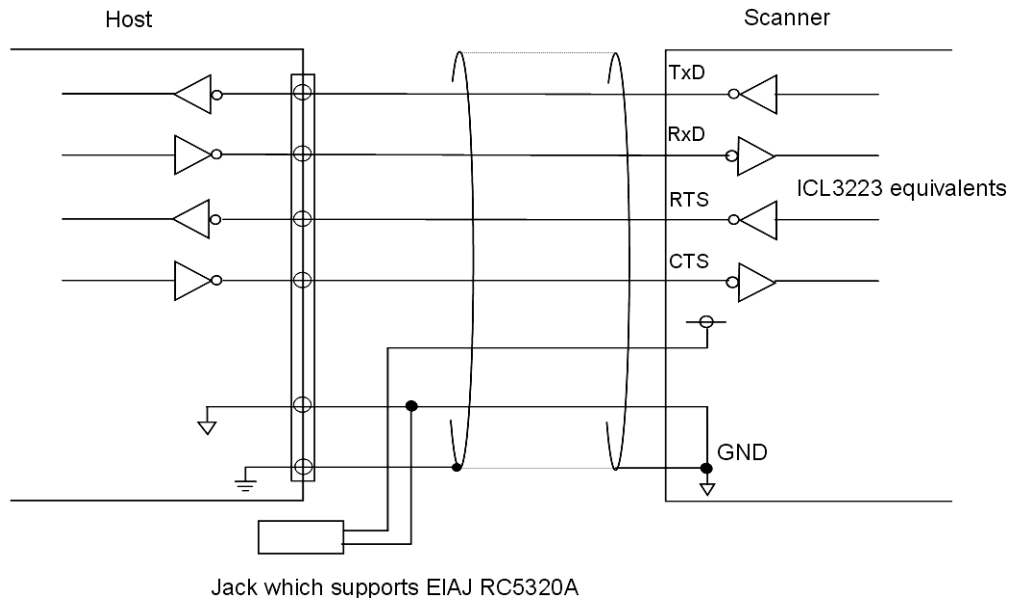


Figure 3: RS-232C D-Sub 9pin Circuit

- Connector : D-Sub 9pin, female
- Power supply : EIAJ RC5320A (voltage classification 2) jack

6.1.1.3. RS-232C D-Sub 9pin Interface Cable

Weight: approx. 90 g

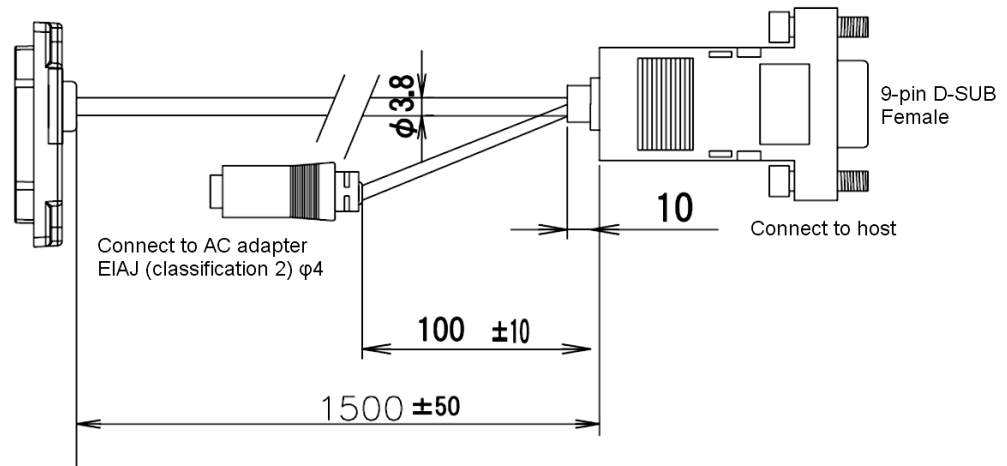


Figure 4: Cable (RS-232C D-Sub 9pin)

[Unit: mm]

**6.1.2. Loose End**

**6.1.2.1. Pin Assignment**

Signal Name	Cable Color	Note
VCC	Red	Power-supply voltage 4.5 ~ 6.6 V
Trigger	Brown	External trigger input terminal
OK	Yellow	External OK output terminal
NG	Orange	External NG output terminal
S-GND	Black	Signal line GND
RTS	Gray	RS-232C communication line
CTS	Blue	RS-232C communication line
TxD	Green	RS-232C communication line
RxD	White	RS-232C communication line
Shield GND	(Black)	Heat shrinkable tube

\* Be sure the wiring is done correctly.

**6.1.2.2. RS-232C Loose End Circuit**

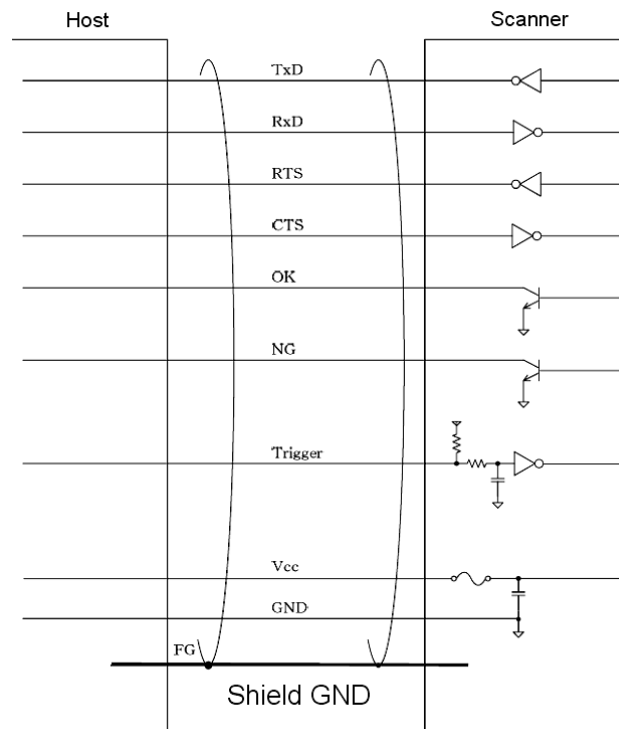



Figure 5: RS-232C Loose End Circuit

**6.1.2.3. RS-232C Loose End Interface Cable**

Weight: approx. 45 g

Wire conductors diameter: AWG28

Insulator outer diameter: 0.65mm

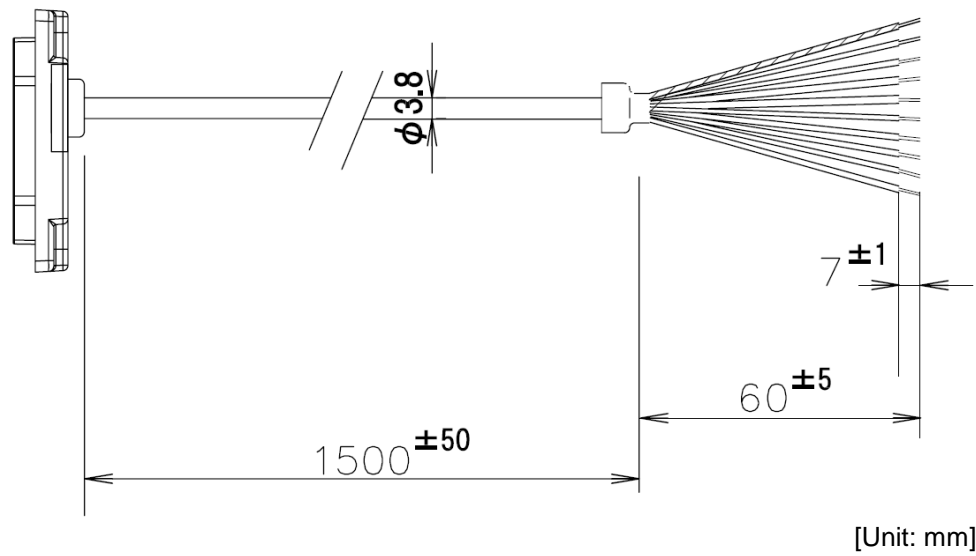*Figure 6: Cable (RS-232C Loose End)*



## 6.2. USB

The USB interface models have two specifications: HID (Human Interface Device Class) and COM (Communication Device Class). With USB-COM model, VCP (Virtual Communication Port) allows virtual serial communication and the commands can be transmitted from the host computer.

\* Multi byte character data or images can be transmitted via USB-COM interface.

### 6.2.1. USB Interface Specifications

Power supply : 500mA (High-Power).  
Speed : Full-speed (12 Mbps)  
Interface : USB-HID / USB-COM (VCP)

- \* The USB model is bus powered.
- \* Images cannot be transmitted via the USB-HID interface.
- \* Multi byte character data can be transmitted via USB-HID interface with settings.
- \* Make sure to connect to a High-power bus (500 mA max) USB terminal.

### 6.2.2. Connector

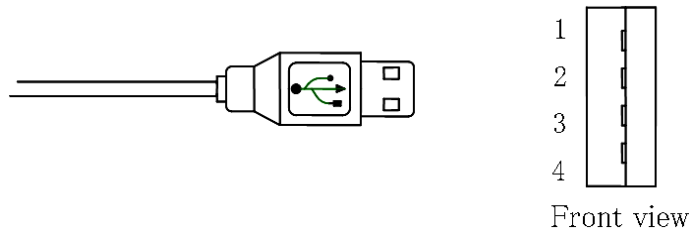


Figure 7: USB Plug (A)

Pin No.	Signal name	Note
1	V bus	
2	Data ( - )	
3	Data ( + )	
4	GND	

### 6.2.3. USB Interface Circuit

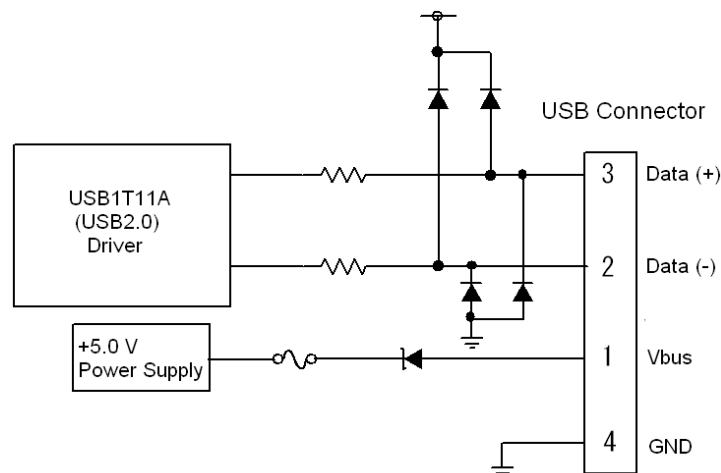


Figure 8: Interface Circuit (USB)

**6.2.4. USB Interface Cable**

Weight: approx. 70 g

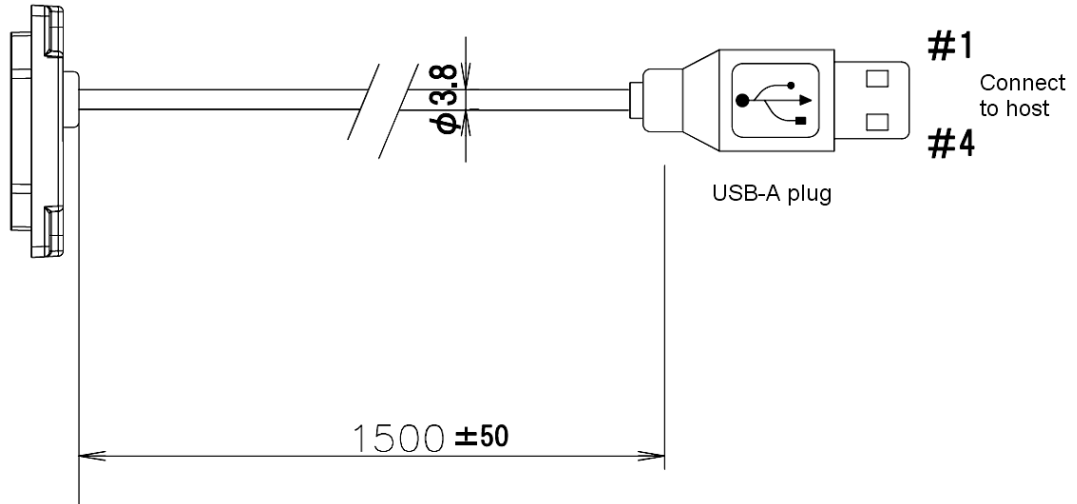


Figure 9: Cable (USB)

[Unit: mm]

## 7. Optical Specifications

### 7.1. Basic Optical Specifications

Item		Characteristics
Scan method	CMOS area sensor (white / black)	-
Number of effective pixel	(Column) × (Row)	752 × 480 dots
Image capture speed (*1)	Frame rate	60 fps
Focal distance	Distance from the front edge of scanner	125 mm
View angle	Horizontal	Approx. 40.6°
	Vertical	Approx. 26.4°
Illumination light source (LED × 2)	Red LED	-
	Peak wavelength	617 nm
	Directivity angle: $2\Phi$ 1/2 (*2)	60°
	Maximum radiation output (*3)	15000 mcd
Aiming light source	Green LED	-
	Peak wavelength	528 nm
	Maximum radiation output (*4)	18700 mcd

\*1 The fastest speed of image capture

\*2 Reference value extracted from the datasheet.

\*3, \*4 Reference value based on the datasheet (25°C, IF = 140 mA ).

**7.2. Aiming Pattern**

The aiming is used for the following purpose:

1. Fill light to recognize the appropriate reading range.
2. Fill light when auto trigger is used.

The aiming specifications are as follows:

- An optical axis of imaging field of view and the center of horizontal aiming width coincide at a distance of  $L=105\pm 20$  mm from the front edge of the scanner.
- The horizontal aiming width to the horizontal width of imaging field of view at a distance of  $L=105$  is  $80\%\pm 10\%$ .

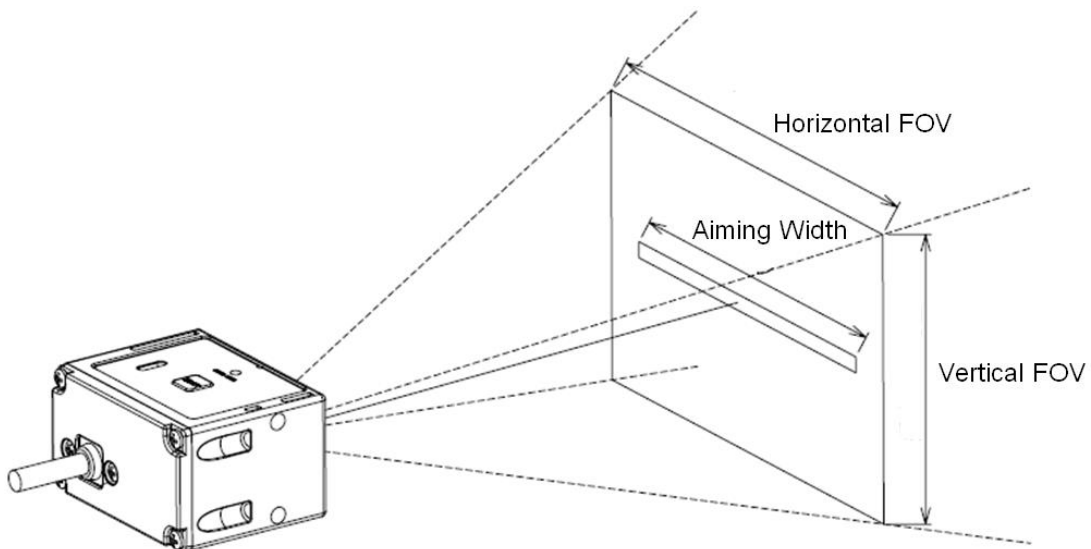


Figure 13: Aiming Pattern and Imaging Range

**7.3. Imaging Range**

The range is  $\pm 5\%$  from the following values.

L: Distance from the front edge of scanner	[mm]	80	100	125	140	160	180
H: Horizontal imaging range	[mm]	59	74	93	104	118	133
V: Vertical imaging range	[mm]	38	47	59	66	75	85

The imaging range is no the scanning range but the imaging field of view.

## 8. Technical Specifications

Aim the laser light at the center of a code to scan it. For long distance scanning, ambient light entering the angle of view may affect the scanning performance. The conditions for technical specifications are as follows, unless otherwise specified in each section.

### <Conditions>

Ambient Temperature and Humidity	Room temperature, room humidity
Ambient Light	100 ~200 lux (on the surface of a bar code)
Angles	Pitch: $\alpha = 0^\circ$ , Skew: $\beta = 15^\circ$ , Tilt: $\gamma = 0^\circ$
Curvature	$R = \infty$
Power Supply Voltage	5.0 V
PCS (1D and 2D)	0.9 or higher
Scanning Test	Accept the performance with 90% or more success rate for 10 tries of scan. One scan should be tested within 2 second.
Barcode Test Sample (1D and 2D)	Specified below.

### < Test chart >

For 1D codes, OPTOELECTRONICS test samples

For GS1 DataBar, stacked codes and 2D codes, printed by a dedicated printer for bar code

## 8.1. Barcode Test Sample

### 1D Bar Codes

<Code 39>

Resolution	Symbology	PCS	Size (mm)	No. of Digits
0.127 mm (5 mil)	Code 39	0.9	32 × 10	15
0.20 mm (7.9 mil)			100 × 10	31
0.254 mm (10 mil)			32.5 × 12	7
0.508 mm (20 mil)			43 × 25	4

<Code 128>

Resolution	Symbology	PCS	Size (mm)	No. of Digits
0.20 mm (7.9 mil)	Code 128	0.9	42 × 10	16

<UPC>

Resolution	Symbology	PCS	Size (mm)	No. of Digits
0.330 mm (13 mil)	12-digit UPC	0.9/0.3	31.5 × 25.0	12

<Codabar>

Resolution	Symbology	PCS	Size (mm)	No. of Digits
0.15 mm (6 mil)	Codabar	0.9	20 × 10	10

### GS1 DataBar/Composite

<GS1-limited>

Resolution	Symbology	PCS	Size (mm)	No. of Digits
0.169 mm (6.7 mil)	Limited	0.9	12 × 1.5	14
0.169 mm (6.7 mil)	Limited-Composite	0.9	12 × 3.0	26

### 2D Codes

<PDF417>

Resolution	Error Correction	PCS	Size (mm)	No. of Character
0.169 mm (6.7 mil)	Level-3	0.9	23 × 10	58
0.254 mm (10 mil)			35 × 15	

<QR Code: Model-2>

Resolution	Error Correction	PCS	Size (mm)	No. of Character
0.212 mm (8.4 mil)	M	0.9	6 × 6	44
0.381 mm (15 mil)			11 × 11	


<Data Matrix>

Resolution	Model	PCS	Size (mm)	No. of Character
0.212 mm (8.4 mil)	ECC200	0.9	5 × 5	40
0.254 mm (10 mil)			6 × 6	

\* The size is outline dimensions excluding the quiet zones.

### 8.2. Scan Area and Depth of Field

The scan area is measured from the front edge of the scanner.

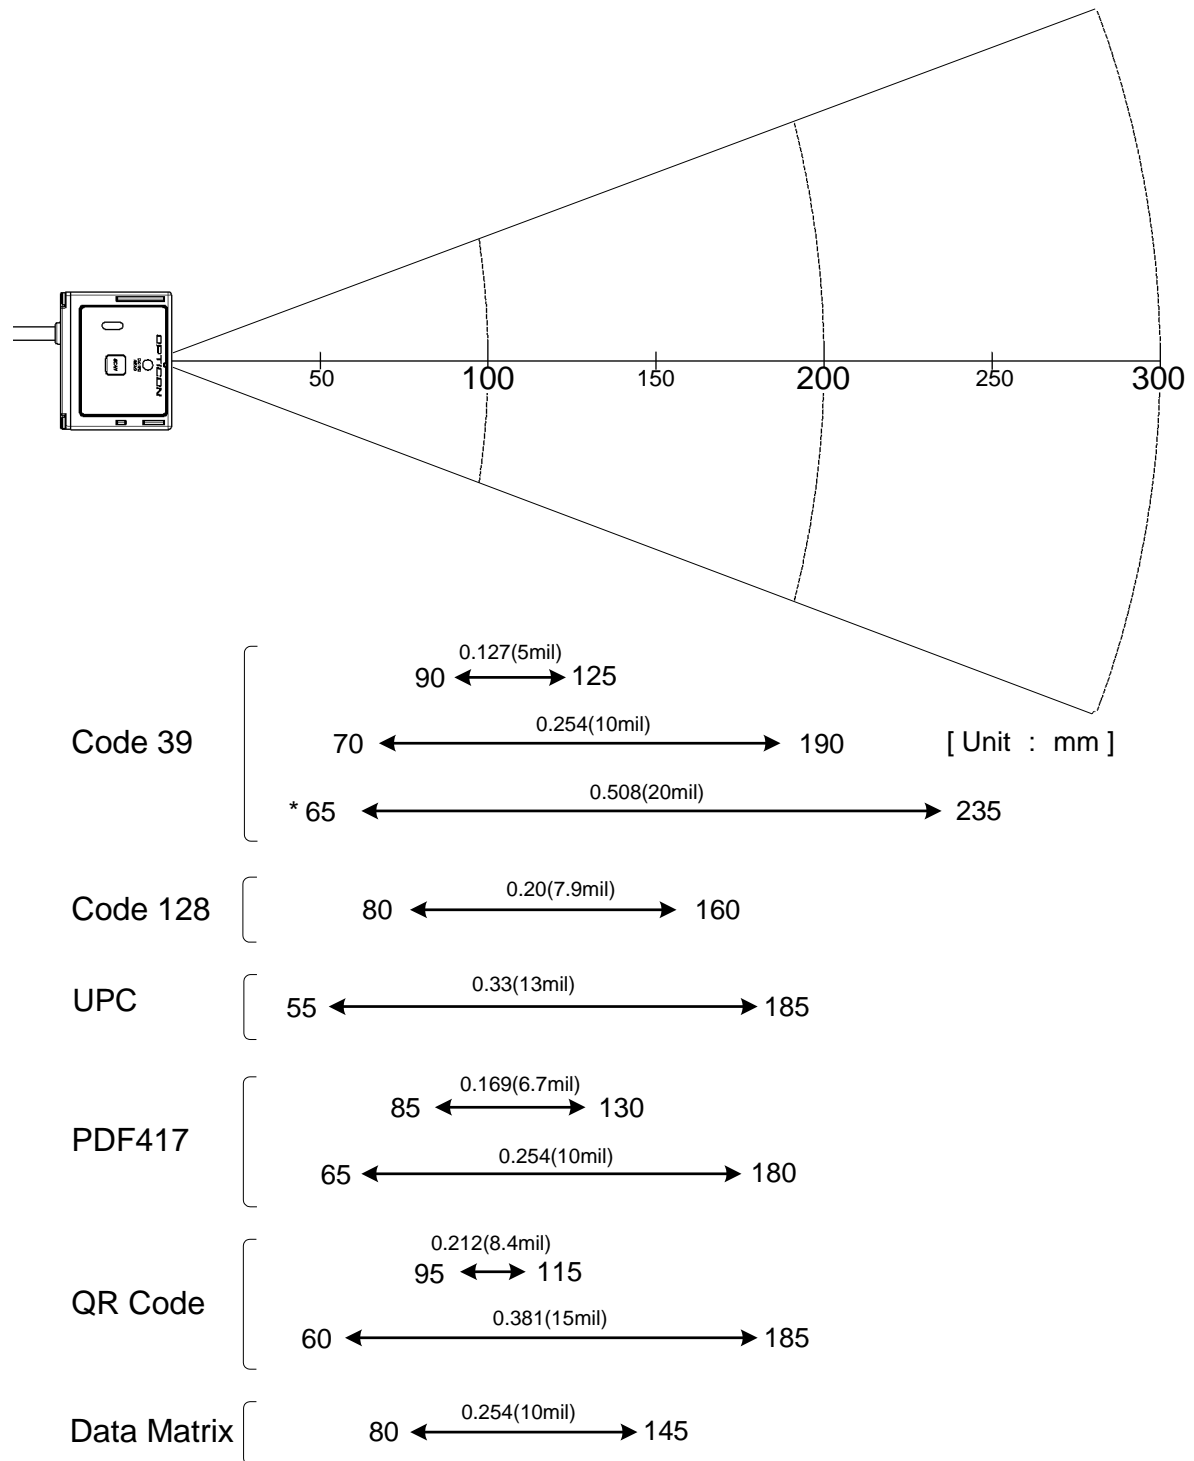

\* The depth of field depends on the view angle and symbol length.

\* Please consider the mounting position by placing a label near the middle of depth of field and eliminate ambient light and specular light from LED illumination.

Figure 14: Scan Area and Depth of Field

**8.3. Printed Contrast Signal (PCS)**

0.3 or higher

<Conditions>

- MRD : 32% and higher  
(70% or higher reflectivity of space and quiet zone)
- Distance : 125 mm from the front edge of the scanner
- Bar Code Sample : UPC specified in Chapter 8.1. (Resolution: 0.33 mm, PCS: 0.3)

MRD = Minimum reflectance of white bar - Maximum reflectance of black bar

$$PCS = \frac{\text{Reflectance of white bar} - \text{Reflectance of black bar}}{\text{Reflectance of white bar}}$$

**8.4. Minimum Resolution**

- 1D Code : 0.127 mm (5 mil) Code 39 specified in Chapter 8.1
- GS1-DataBar : 0.169 mm (6.7 mil) GS1 DataBar Limited specified in Chapter 8.1
- Stacked Code : 0.169 mm (6.7 mil) PDF417, GS1 DataBar Limited Composite specified in Chapter 8.1
- 2D Code : 0.212 mm (8.4 mil) QR Code and Data Matrix specified in Chapter 8.1

<Conditions>

- Bar Code Sample : The above codes specified in Chapter 8.1
- Distance : 95 mm from the front edge of the scanner
- Angle :  $\alpha = 0^\circ, \beta = +15^\circ, \gamma = 0^\circ$
- Curvature :  $R = \infty$

**8.5. Wide Bar Code**

Code 39 with width of 100 mm and resolution of 0.2 mm can be read

<Conditions>

- Bar Code Sample : 0.20 mm Code 39 / PCS 0.9 specified in Chapter 8.1
- Distance : 155 mm from the front edge of the scanner
- Angle :  $\alpha = 0^\circ, \beta = +15^\circ, \gamma = 0^\circ$
- Curvature :  $R = \infty$

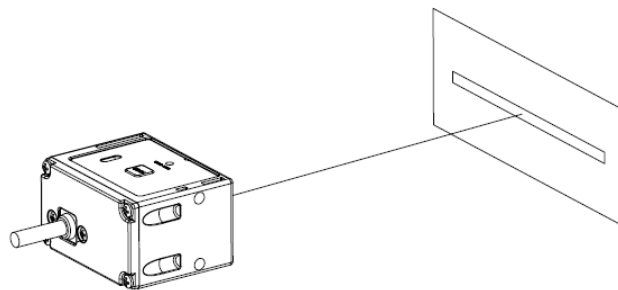


Figure 15: Wide Bar Code



**8.6. Pitch, Skew and Tilt**

Pitch :  $\alpha = \pm 50^\circ$   
 Skew :  $\beta = \pm 50^\circ$   
 Tilt :  $\gamma = \pm 180^\circ$

<Conditions>

Bar Code Sample : 0.33 mm UPC specified in Chapter 8.1  
 Distance : 125 mm from the front edge of the scanner  
 Curvature :  $R = \infty$

\* For the pitch angle and tilt angle measurement, set the skew angle  $\beta = +15^\circ$

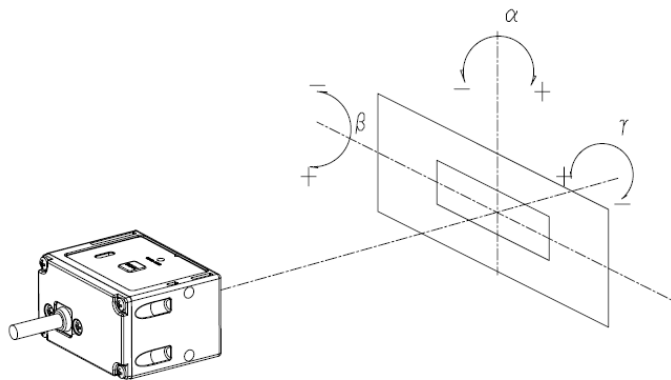


Figure 16: Pitch, Skew and Tilt

**8.7. Curvature**

0.33 mm 12-digit UPC :  $R \geq 20 \text{ mm}$   
 0.15 mm 10-digit Codabar :  $R \geq 16 \text{ mm}$

<Conditions>

Bar Code Sample : 0.33 mm UPC, 0.15 mm Codabar specified in Chapter 8.1  
 Distance : 105 mm from the front edge of the scanner  
 Angle :  $\alpha = 0^\circ, \beta = +15^\circ, \gamma = 0^\circ$

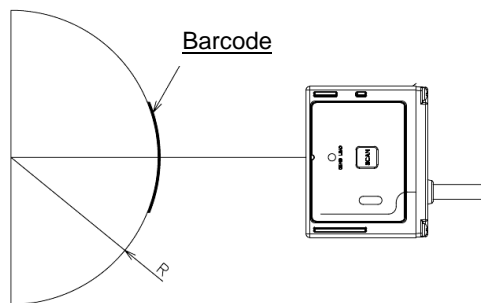


Figure 17: Curvature

Note: Scanning may fail due to the specular reflection of LED illumination when the reflectivity is high.

### 8.8. Auto Trigger

The scanner starts scanning automatically when it detects a change in brightness that occurs when a bar code label is presented in front of it.

Trigger should be enabled when inserting a gray-colored paper on a black backing paper.

Trigger also should be enabled when inserting a black-colored paper on a gray backing paper.

<Conditions>

- Paper used : Black paper from Glory called as Black 010010016
- : Gray paper from Glory called as Silver-gray 010010016
- Ambient Light : 500 ~ 1000 lux
- Moving Speed of Detected Paper : 2 m/second or slower
- Ambient Temperature and Humidity : Room temperature and room humidity

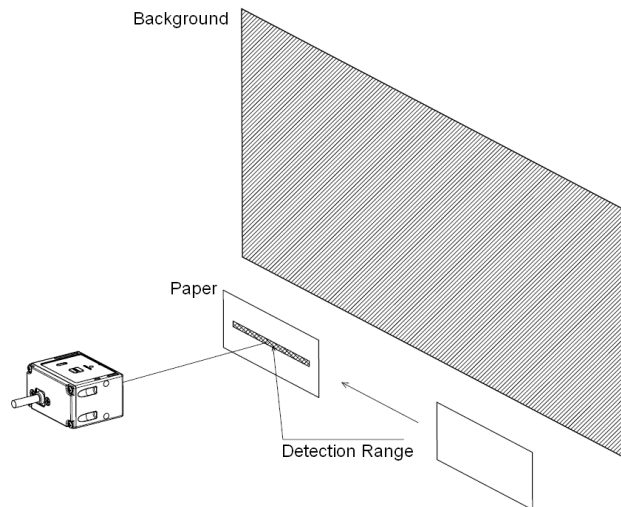


Figure 18: Auto Trigger

### 8.9. Motion Tolerance

UPC can be read when it is moving at 2m/s.

<Conditions>

- Ambient Temperature and Humidity : Room temperature and Room humidity
- Ambient Light : 500 ~ 1000 lux
- Distance : 125 mm from the front edge of the scanner
- PCS (1D and 2D) : 0.9 or higher
- Bar Code Sample : Refer to Chapter 8.1.

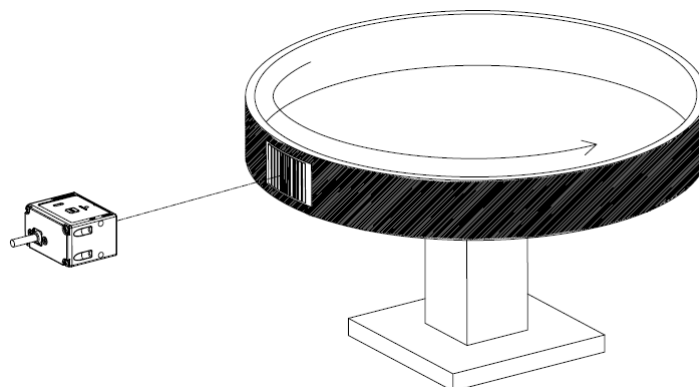


Figure 19: Motion Tolerance

\* Scanning may fail due to the specular reflection of LED illumination when the reflectivity is high.

## 9. Environmental Specifications

### 9.1. Temperature

Scanning performance is guaranteed when the range of ambient temperature around the scanner is the following values:

Operating Temperature	: -20 ~ 50 °C
Storage Temperature	: -20 ~ 60 °C

<Conditions>

Bar Code Sample	: 0.33 mm UPC specified in Chapter 8.1
Distance	: 125 mm from the front edge of the scanner
Angle	: $\alpha = 0^\circ$ , $\beta = +15^\circ$ , $\gamma = 0^\circ$
Curvature	: $R = \infty$
Scanning Test	: Read at intervals of 300 ms

\* When you attach this scanner to a place with few crevices, or the bad place of breathability, please check the circumference temperature of this scanner.

### 9.2. Humidity

Scanning performance is guaranteed when the range of ambient humidity around the scanner is the following values:

Operating Humidity	: 20 ~ 85% RH (no condensation, no frost)
Storage Humidity	: 20 ~ 90% RH (no condensation, no frost)

<Conditions>

Bar Code Sample	: 0.33 mm UPC specified in Chapter 8.1
Distance	: 125 mm from the front edge of the scanner
Angle	: $\alpha = 0^\circ$ , $\beta = +15^\circ$ , $\gamma = 0^\circ$
Curvature	: $R = \infty$

### 9.3. Ambient Light Immunity

Scanning performance is guaranteed when the range of illumination on a barcode surface is between zero and the following values:

Incandescent light : 10,000 lux  
Fluorescent light : 10,000 lux  
Sunlight : 100,000 lux

<Conditions>

Bar Code Sample : 0.33 mm UPC specified in Chapter 8.1  
Distance : 125 mm from the front edge of the camera module  
Angle :  $\alpha = 0^\circ$ ,  $\beta = +15^\circ$ ,  $\gamma = 0^\circ$   
Curvature :  $R = \infty$   
Power Supply Voltage : 5.0 V

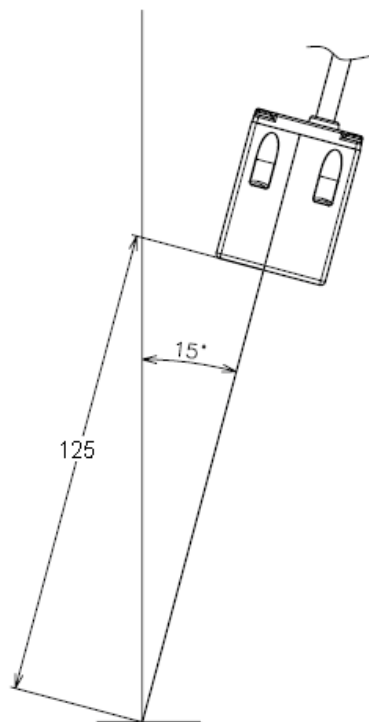


Figure 20: Ambient Light Immunity

\* Be sure that the direct light or specular reflection from the light source does not enter the light receiving section of the NLV-3101.

### 9.4. Dust and Drip Proof

IEC IP65 equivalent

### 9.5. Cable Strength

There shall be no sign of malfunction after the following cable strength test.

**Cable Strength Test:** Affix the scanner to an immovable object and pull it using a force of 24.5 N (2.5 kgf static loading) for 1 second. Repeat this 20 times continuously.

### 9.6. Cable Bending Strength

There shall be no sign of malfunction after the following cable bending test.

**Cable Bending Test:** Add a load of 4.9 N (500 gf) to a cable and bend it at an angle of 60° to both right and left. Repeat this 1000 times continuously.

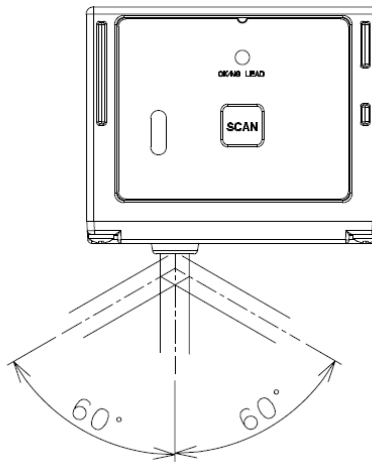


Figure 21: Cable Bending

### 9.7. Vibration Strength (without packing)

There shall be no sign of malfunction after the following vibration test.

**Vibration test:** Increase the frequency of the vibration from 10Hz to 100Hz at an accelerated velocity of  $19.6\text{m/s}^2$  (2.0 G) for 30 minutes (60 minutes per cycle) in the non-operating state. Repeat this in each X, Y and Z direction.

### 9.8. Vibration Strength (in individual packing)

There shall be no sign of malfunction after the following vibration test.

**Vibration test:** Increase the frequency of the vibration from 10Hz to 100Hz at an accelerated velocity of  $19.6\text{m/s}^2$  (2.0 G) for 30 minutes (60 minutes per cycle) in individually packaged state. Repeat this in each X, Y and Z direction.

### 9.9. Drop Impact Strength (without packaging)

There shall be no sign of malfunction after the following drop test.

**Drop test:** Drop the scanner three times (15 times in total), at each 5 face, from a height of 75 cm onto a concrete floor as shown below.

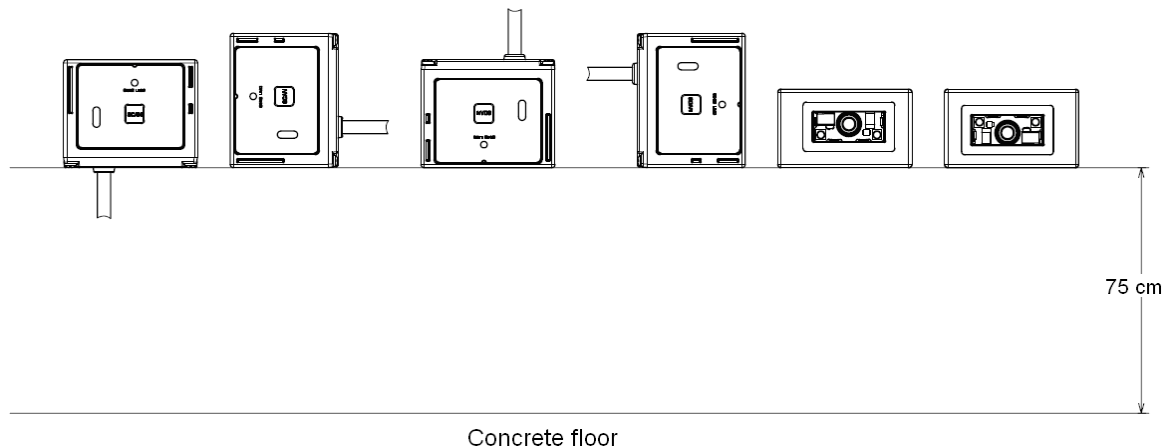


Figure 22: Drop Test

### 9.10. Drop Impact Strength (in individual packaging)

There shall be no sign of malfunction after the following drop test.

**Drop test:** Drop an individually packaged scanner 10 times in total, at any of 1 corner, 3 edges, and 6 faces, from a height of 100 cm onto a concrete floor.

### 9.11. Electrical Specifications

Withstand Voltage	: AC 1500 V / 60 seconds, 10 mA or less
Insulation Resistance	: DC 500 V, 2 M $\Omega$ or higher
Current Leakage	: 250 $\mu$ A or less / AC 250 V 60 Hz
Power Line Noise Immunity	: $\pm$ 1 kV or lower
Electrostatic Discharge Immunity	: No destruction found ( $\pm$ 15 kV, air or direct discharge)
	: No malfunction found ( $\pm$ 8 kV, air or direct discharge)
	: $\pm$ 6 kV (contact, direct or indirect discharge)

\*Testing method is compliant with IEC-61000-4-2. (150 pF, 330  $\Omega$ )

## 10. Regulatory Compliance

### 10.1. LED Safety

IEC 62471:2006 Exempt Risk Group

### 10.2. EMC

EN55024:2010

EN55032:2012 +AC:2013 Class B

FCC Part 15 Subpart B Class B

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: ( 1 ) this device may not cause harmful Interference, and ( 2 ) this device must accept any interference received, including interference that may cause undesired operation.

VCCI Class B

この装置は、クラスB情報技術装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。取扱説明書に従って正しい取り扱いをして下さい。

VCCI-B

## 11. RoHS

The NLV-3101 is compliant with RoHS directive.

RoHS: The restriction of use of certain hazardous substance in electrical and electronic equipment.

Directive 2011/65/EU

Commission Delegated Directive (EU) 2015/863

## 12. Reliability

MTBF (Mean Time Between Failures) 50,000 hours

Note: The reliability of the NLV-3101 is guaranteed as far as it is operated under normal operating conditions in the range of advised operating temperature and without excessive electrical or mechanical shock.

## 13. Precautions

Handle this product carefully. Do not deliberately subject it to any of the following.

### 13.1. Shock

- Do not throw or drop the imager.
- Do not place heavy objects on the cables.

### 13.2. Temperature Conditions

- Do not use the imager at temperatures outside the specified range.
- Do not pour boiling water on the imager.
- Do not throw the imager into the fire.
- Do not forcibly bend the cables at low temperatures.

### 13.3. Foreign Materials

- Do not subject the imager to chemicals.

### 13.4. Other

- Do not plug/unplug the connectors before disconnecting the power.
- Do not disassemble this product.
- Do not place the product near a radio or a TV receiver, as the imager may cause reception problems.
- The imager may be damaged by voltage drops.

### 13.5. Disposal

- This product may contain hazardous or toxic chemicals that are not suited for household waste disposal. Please dispose of responsibly at a waste site for electrical and electronic equipment.



## 14. Product Label

The product label is affixed to the scanner as shown below.

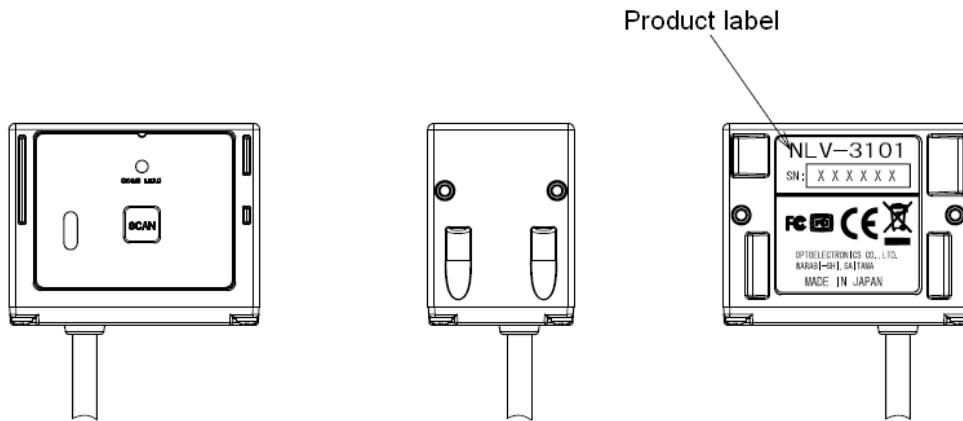


Figure 23: Product Label Position

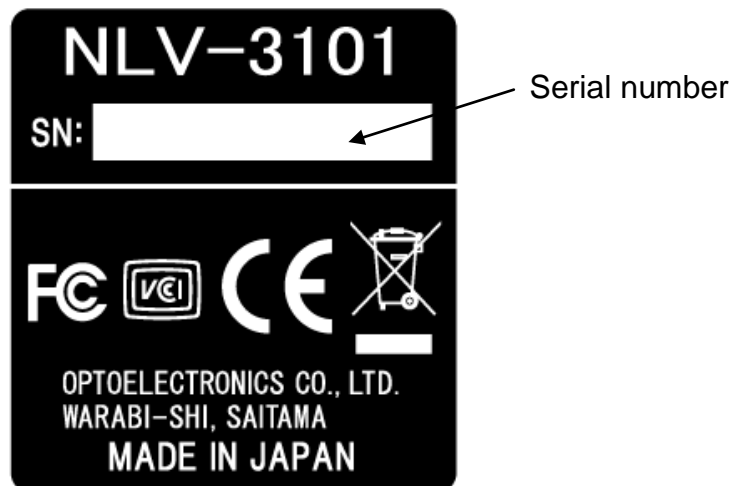


Figure 24: Enlarged View of Label

## 15. Packaging Specifications

### 15.1. Individual Packaging


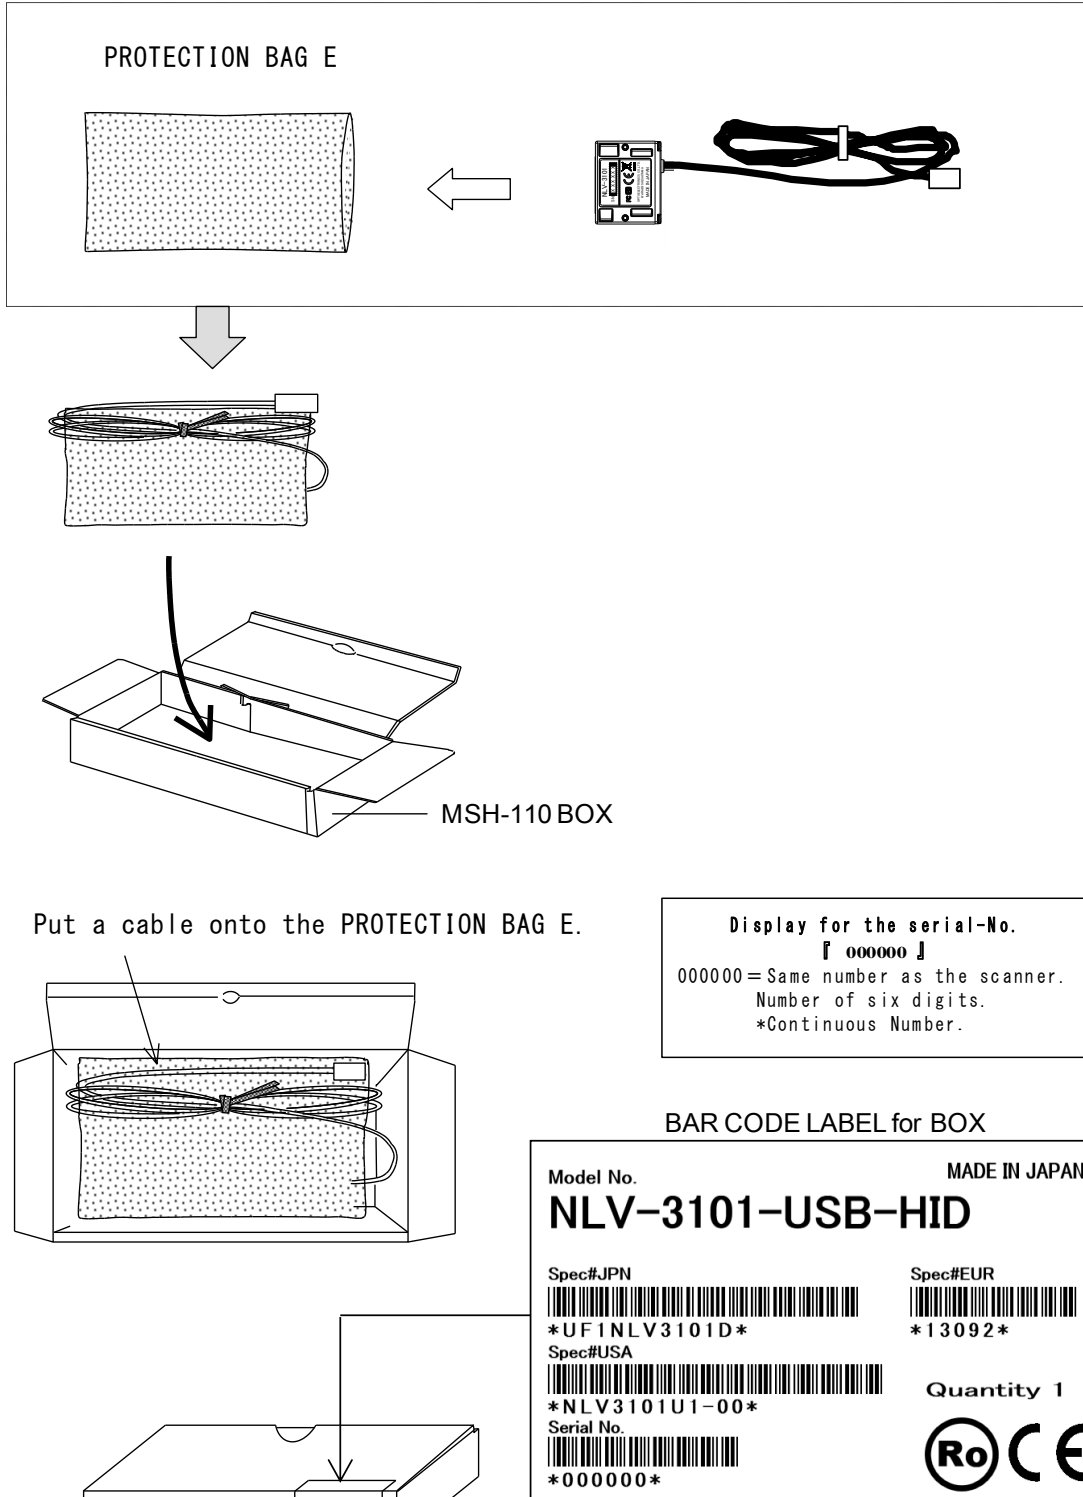


Figure 25: Individual Packaging

### 15.2. Collective Packaging

Assembled package size : 520 x 600 x 430 (DWH mm)

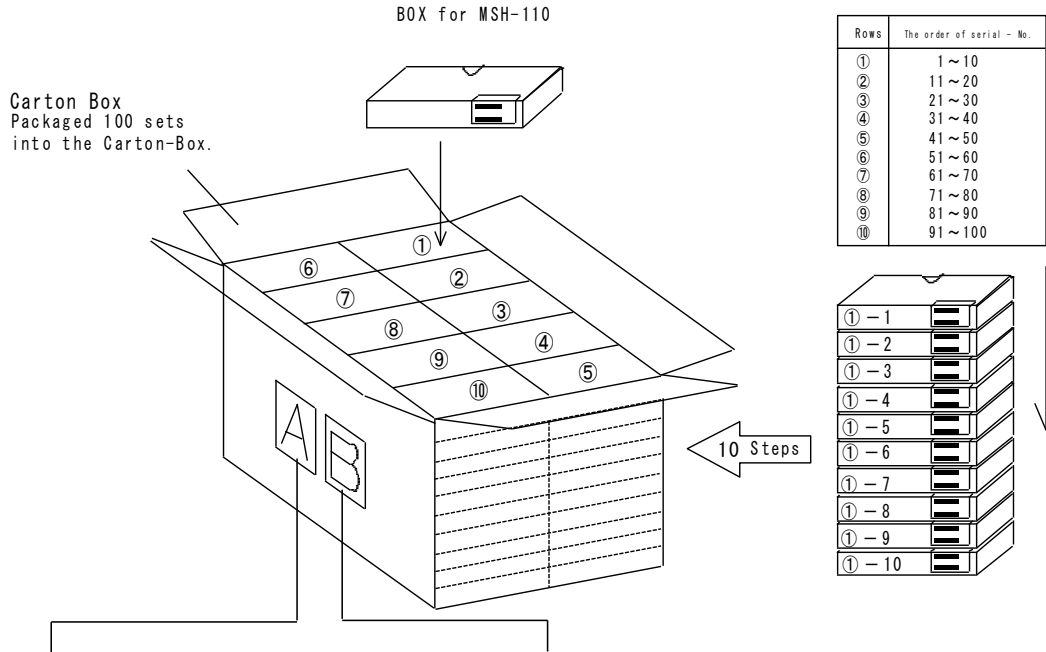

A : Barcode Serial Label for Packaging Box:  
Stick the labels on both front and back side of the box.

B : Missing Serial Number Label:  
Attach this label when there are more than 3 labels of which serial numbers are out of order (not in a correct sequence).

**UNIVERSAL** C/No.?????  
MADE IN JAPAN

Product **NLV-3101-USB-HID**

PO# \*000000000000\*

Spec#JPN \*UF1NLV3101D\*

Spec#EUR \*13092\*

Spec#USA \*NLV3101U1-00\*

Q'ty \*000\* S/N(from) \*000000\*

??? / ??? S/N(to) \*000000\*

Missing Serial Number	Missing Q'ty	2
1	*000000*	
2	*000000*	

ROM Ver.(Module CPU) BA01 J34

Shipping Date ??? / ?? / ??

OPTOELECTRONICS CO.,LTD.

**UNIVERSAL** C/No.?????  
MADE IN JAPAN

Missing Serial Number	Missing Q'ty	???
3	*000000*	
4	*000000*	
5	*000000*	
6	*000000*	
7	*000000*	
8	*000000*	
9	*000000*	
10	*000000*	
11	*000000*	
12	*000000*	

OPTOELECTRONICS CO.,LTD.

Figure 26: Collective Packaging

Note: 'Ro mark' on the trays and the boxes for the product indicates that the product is RoHS compliant, which is declared by Optoelectronics Co., Ltd.

## 16. Physical Features


### 16.1. Dimensions

Approx. 41.1 × 33.0 × 24.0 (DWH mm)

### 16.2. Weight

Approx. 30 g (excluding the cable)

### 16.3. Mechanical Drawing

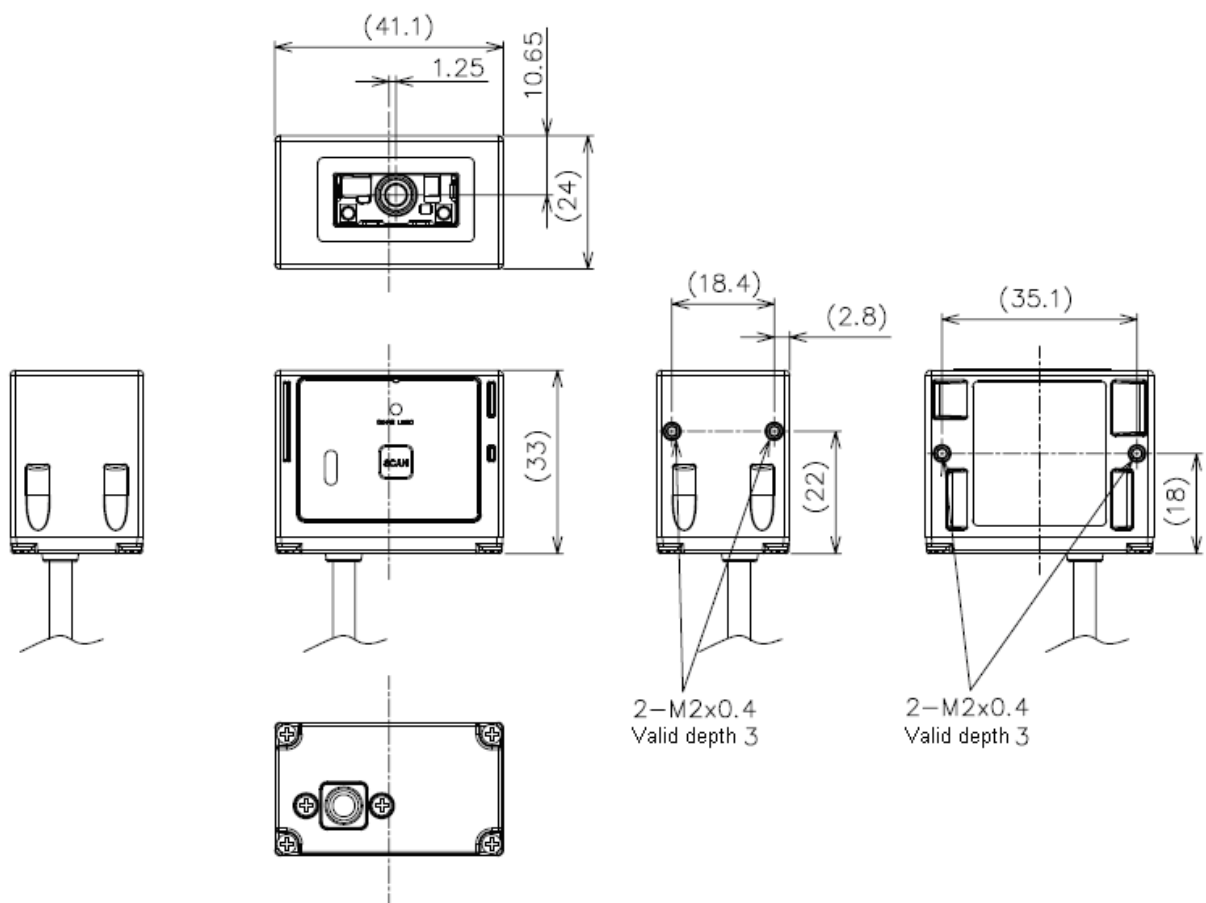


[Unit: mm]

Figure 27: Mechanical Drawing

## 17. Default Setting

### 17.1. Default Setting Menu Code

The NLV-3101 is set to default settings by reading the following menu label regardless of the interface types.

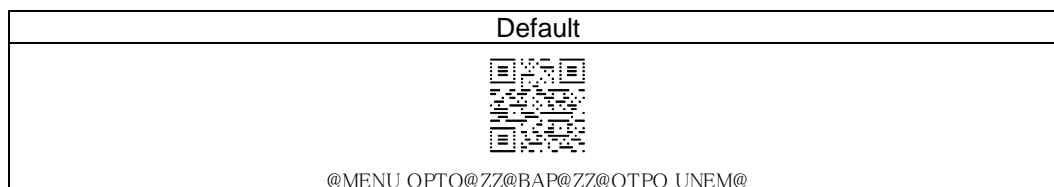

### 17.2. Supported Symbolologies

#### 17.2.1. 1D Bar Codes

Code type	Default	Minimum length	Remarks
UPC	○	-	
UPC Add-on 2 UPC Add-on 5			
EAN(JAN)	○	-	
EAN Add-on 2 EAN Add-on 5			
EAN-13	○		
EAN-13 Add-on 2 EAN-13 Add-on 5			
EAN-8	○		
EAN-8 Add-on 2 EAN-8 Add-on 5			
Code 39	○	1	Not transmit ST/SP
Tri-Optic	○	-	Not transmit ST/SP
Codabar (NW7)	○	2	Not transmit ST/SP
Industrial 2of 5	○	5	
Interleaved 2of 5	○	6	
S-Code		5	
Code 128	○	1	GS1 conversion (setting required)
Code 93	○	1	
IATA	○	5	
MSI/Plessey		3	
UK/Plessey		2	
Telepen		1	
Code 11		1	
Matrix 2 of 5		5	
Chinese Post Matrix 2 of 5		-	
Korean Postal Authority		-	
Intelligent Mail Barcode		-	
POSTNET		-	
JPN (Customer Bar Code)		-	

**17.2.2. GS1 DataBar, Composite Code**

Code type	Default	Remarks
GS1 DataBar •GS1 DataBar Omnidirectional •GS1 DataBar Truncated •GS1 DataBar Stacked •GS1 DataBar Stacked Omnidirectional	○	GS1 conversion (setting required)
GS1 DataBar Limited	○	
GS1 DataBar Expanded •GS1 DataBar Expanded •GS1 DataBar Expanded Stacked	○	
Composite GS1-DataBar •CC-A •CC-B •Limited CC-A •Limited CC-B •Expanded CC-A •Expanded CC-B	○	GS1 conversion (setting required)
Composite GS1-128 •CC-A •CC-B •CC-C	○	GS1 conversion (setting required)
Composite EAN •EAN-13 CC-A •EAN-13 CC-B •EAN-8 CC-A •EAN-8 CC-B		GS1 conversion (setting required)
Composite UPC •UPC-A CC-A •UPC-A CC-B •UPC-E CC-A •UPC-E CC-B		GS1 conversion (setting required)

**17.2.3. 2D Codes**



Code type	Default	Remarks
PDF417	○	
Micro PDF417		
Codablock F		
QR Code	○	GS1 conversion (setting required)
Micro QR	○	
Data Matrix (ECC 200)	○	GS1 conversion (setting required)
Aztec Code	○	
Aztec Runes		
Chinese-sensible code		
Maxi Code		

**17.3. Other Default**

Item	Default Setting
Read mode	Single read
Extended read time	Disable
Buzzer duration	100 ms
Buzzer tone	2.7 kHz
Startup buzzer	Enable
Buzzer loudness	Max (100%)
Buzzer timing	Before data transmission
Good read LED indicator duration	200 ms
Data buffering	Buffered mode

**[Data buffering]**

Not all output data can be received depending on the host system. Therefore, it is recommended to use buffered mode for USB-HID interfaces and Unbuffered mode for RS-232C and USB-COM interfaces.

Unbuffered mode	Buffered mode (default)
 <small>@MENU OPTO@ZZ@D80@ZZ@OTPO UNEM@</small>	 <small>@MENU OPTO@ZZ@D81@ZZ@OTPO UNEM@</small>

\* Refer to "NLV-3101 User's Manual" for supported commands.

**17.4. RS-232C Default**

Item	Default Setting
Baud rate	9600 bps
Parity bits	None parity
Data length	8 bits
Stop bits	1 bit
Handshaking	No handshake
ACK/NAK	ACK/NAK no response
CTS time out	Indefinitely
ACK/NAK time out	1 second
Command header	ESC or STX
Command terminator	CR or ETX
Response to the commands	Disable

### 17.5. USB-COM

It is necessary to install OPTOELECTRONICS USB Driver to a host.

Item	Description
Baud rate	USB2.0 Full Speed
Power supply	500 mA
Vender ID	065A
Product ID	A002
Standards	CDC-ACM

### 17.6. USB-HID Defaults

Item	Default Setting
Keyboard language	USA
Output mode	Output all values
Character encoding	None
“LF” output	Disable