


CHG-250

Charging cradle

The CHG-250 charging cradle is the dedicated charging cradle for the L-250BT wireless barcode scanner. With versatile mounting options and reliable charging performance, it is the ideal accessory to keep your scanner powered, organized, and ready for use.

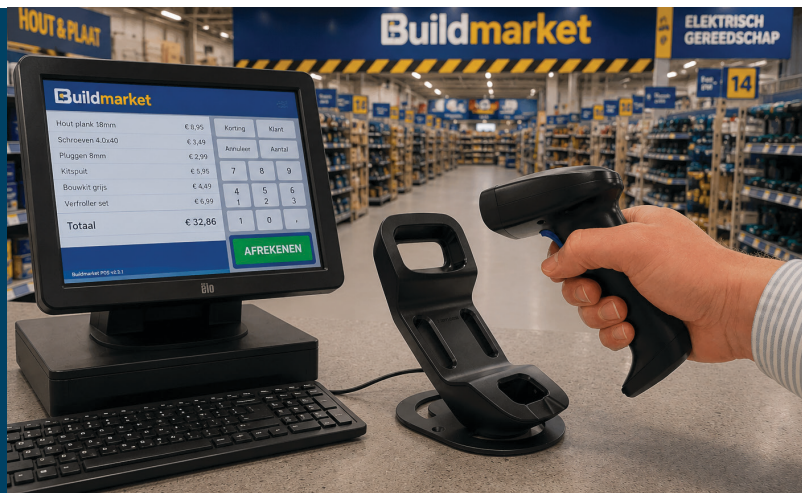

Specifications

Power

Voltage requirements: 5V, 1.5A/0.5A (USB)

Charging method: charging pins for the scanner

Durability

Temperature in operation: -5 to 50 °C / 23 to 122 °F

Temperature in storage: -30 to 60 °C / -22 to 140 °F

Humidity in operation: 25 - 85% (non-condensing)

Humidity in storage: 20 - 90% (non-condensing)

Physical

Dimensions (W x H x D): 105.4 x 153.4 x 60 mm
/ 4.15 x 6.04 x 2.36 in

Weight body: Ca. 80 g / 2.7 oz

Case: ABS, Black

Regulatory & safety

Product compliance: CE, RoHS

Items

Included: Single-slot cradle, metal base plate, screws (x3)

Sold separately: USB-C cable, USB charger

Mounting options



© Copyright Opticon. All rights reserved. This information is subject to change without prior notice. For availability, contact your local representative.