


The Single Dock with battery charging for Portable Data Terminal (PDT).
The communications with PC are optionally done via RS232 or USB connections.
A USB-host port provides connections with other USB devices.

Installing PDT to Single Dock

CAUTION:

1. The Single Dock can be used on horizontal surface only; it can't be used for wall mount.
2. Use Only the Single Dock adapter (5Vdc/6.5A) for DC power input and the PDT adapter (5Vdc/2.6A) can not use in the Single Dock.

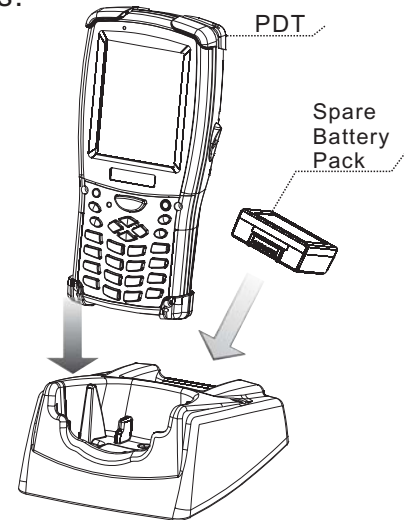

Charging Spare Battery Pack Note:

1. Both PDT internal battery and spare battery pack can be charged simultaneously.
2. The charging LED indicator will show the charging status of spare battery pack.

Red: Charging

Green: Fully charged

